

PRODUCT INFORMATION

# S100/80

## Single pole emergency disconnect switch for industrial trucks



Schaltbau S100 Series emergency disconnect switches guarantee instantaneous cut-out by manual operation.

Load circuits are closed by pulling the red knob and, in an emergency, forcibly ruptured by pushing it down. Once actuated, the spring-loaded snap mechanism of the switch will complete the switch off procedure in any case. For ON and OFF there are two maintained positions.

Special feature: The knob can be used as key. When engaged to the OFF position it can be removed so as to prevent unauthorized use of the truck.


### Features:

- Single pole emergency disconnect switch with snap mechanism
- Key function: Knob removable in OFF position
- Maintained position for ON and OFF
- High resistance to shock and vibration
- Optional auxiliary switch

### Application:

Especially designed for industrial trucks such as powered pallet jacks and walkie-stackers

### Dimension diagram

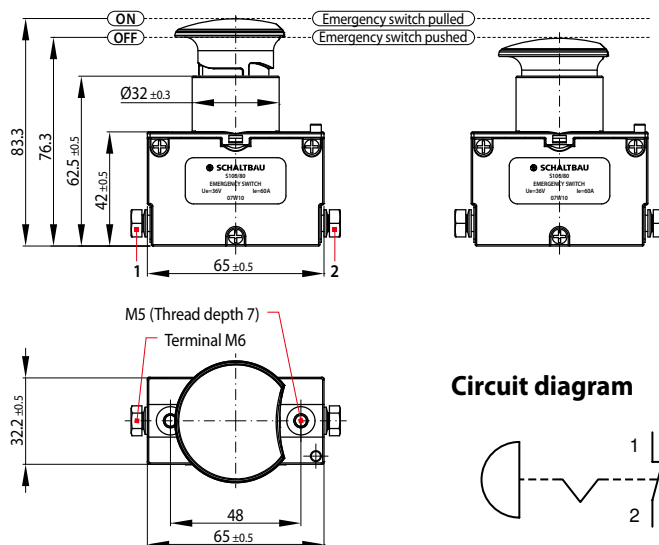

### Circuit diagram



Dimensions in mm

### Specifications

Kind of voltage	DC
Main contacts, configuration, # of	1x NC
Nominal voltage $U_n$	24 V / 36 V / 48 V
Rated insulation voltage $U_i$	150 V
Rated impulse withstand voltage $U_{imp}$	2.5 kV
Pollution degree	PD3
Overvoltage category	OV3
Rated operating current $I_e$ (70 % duty cycle, duration 60 s)	80 A
Conventional thermal current $I_{th}$	60 A
Blowout magnets	no, bi-directional
Main contacts, material/terminal	AgSnO <sub>2</sub> / M6
Auxiliary contact	1x SPDT S880, optional
Mechanical/electrical endurance $U_e = 36 V; I_e = 60 A; T < 1 ms$	> 100,000 operating cycles
Degree of protection	IP44 above mounting plate IP30 below mounting plate IP00 terminals
Mounting position	vertical
Weight	165 g
Standards	EN 1175-1 (IEC 60947-5-1, IEC 60947-5-5)