


Connect - Contact - Control

Emergency Disconnect Switch Single and Double Pole S135 Series



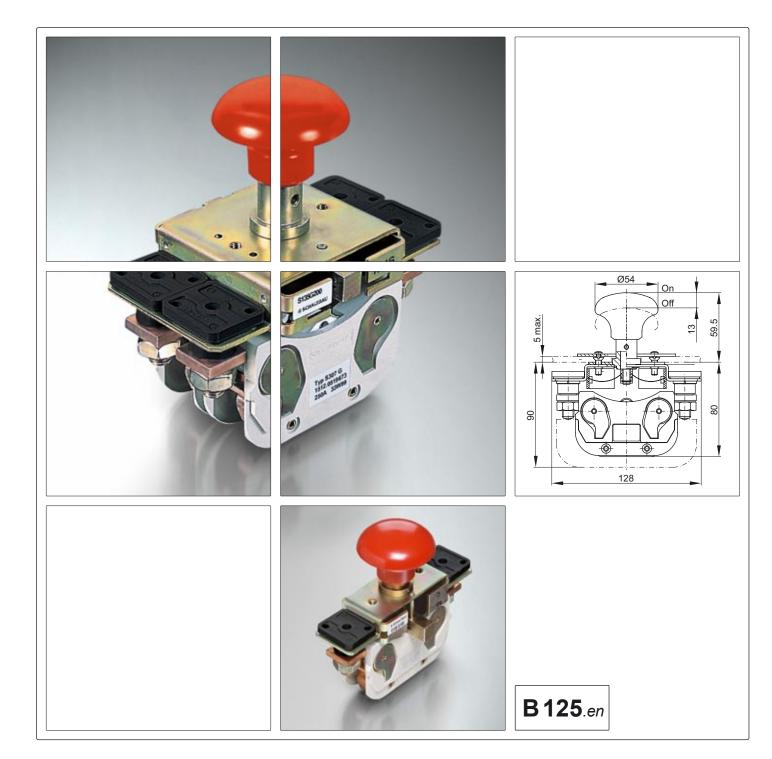


Single and double pole emergency disconnect switch S 135

The switches are designed to open a power circuit quickly and effectively under emergency conditions. Installation of these switches enhances safety significantly (requirements for accident prevention).

Fitted with our switching elements 306M (160 A) or 307G (250 A) the S135 features a snap action mechanism and double break contacts. The switch is in the "On" position with the red knob extended. Pushing the knob instantly opens the circuit and the permanent magnet blowouts ensure that inductive arcs are extinguished. In case of electrical or mechanical damage of the switching element, it can be changed easily, which guarantees an extended life of the unit as well as cost effective maintenance. When fitted with the optional keyswitch, the S135 may be locked in the "Off" position so as to prevent unauthorized use of any equipment.

Technical Data		
Conventional thermal Current I _{th}	160 A / 250 A respectively	
Breaking capacity	see list B 40	
Rated insulation voltage U _i	320 V	
Rated impulse with stand voltage $\mathbf{U}_{\mathrm{imp}}$	4 kV at PD 3	
Mechanical life	30,000 operations	
Protection of terminals	IP 00	
Mounting position	any	
Terminal	Bolt M8 / M10 respectively	
Maximum terminal tightening torque	M 8: 6 Nm max. M 10: 10 Nm max.	

Device outline

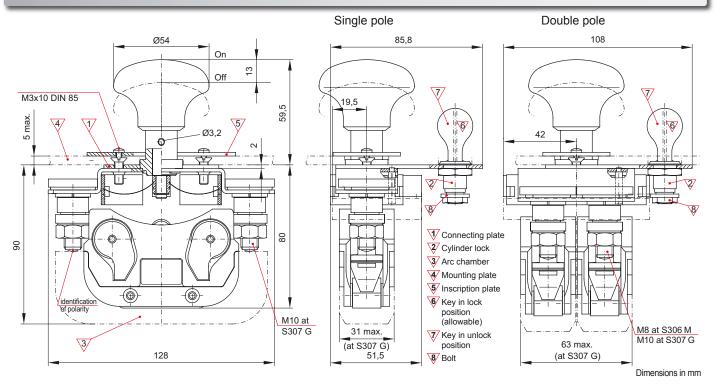


Versions, Mounting template, Ordering code

Versions:

Series	Switching element	Convent. ther- mal current I _{th}	Weight
S135 M1-00*	1x S306 M	160 A	0.65 kg
S135 M2-00*	1x S306 M	160 A	1.10 kg
S135 G1-00*	1x S307 G	250 A	0.75 kg
S135 G2-00*	1x S307 G	250 A	1.25 kg

- * Due to the regulations for accident prevention 'Industrial trucks' in some countries the vehicles have to be fitted with different locks depending on the kind of operation. We supply:
- Driver operated vehicles: Lock code number 51
- Pedestrian operated vehicles: Lock code number 65

Mounting template:



Note: For mounting the red knob can be taken off. A 3 mm dia. pin put in a hole through both shafts serves as a counter support.

Ordering code:

Series S135 M1-00

Switching elements M S306, I_{th}=160 A G S307, I_{th}=250 A

Numbers of switching elements 1 1-pole 2 2-pole

Lock code numbers*

00 without lock

Accessories:

Cylinder lock 51 ZHS 4A251
Cylinder lock 65 ZHS 4A265
Connecting plate ZP-S13x

Schaltbau GmbH Hollerithstrasse 5 81829 Munich Germany B 1761/0310/1.0 Printed in Germany Phone +49 89 9 30 05-0 Fax +49 89 9 30 05-350 e-Mail contact@schaltbau.de Internet www.schaltbau.com

We reserve the right to make technical changes without prior notice.

Issued January 2009